



Product Information

Periphery module

PM DI16

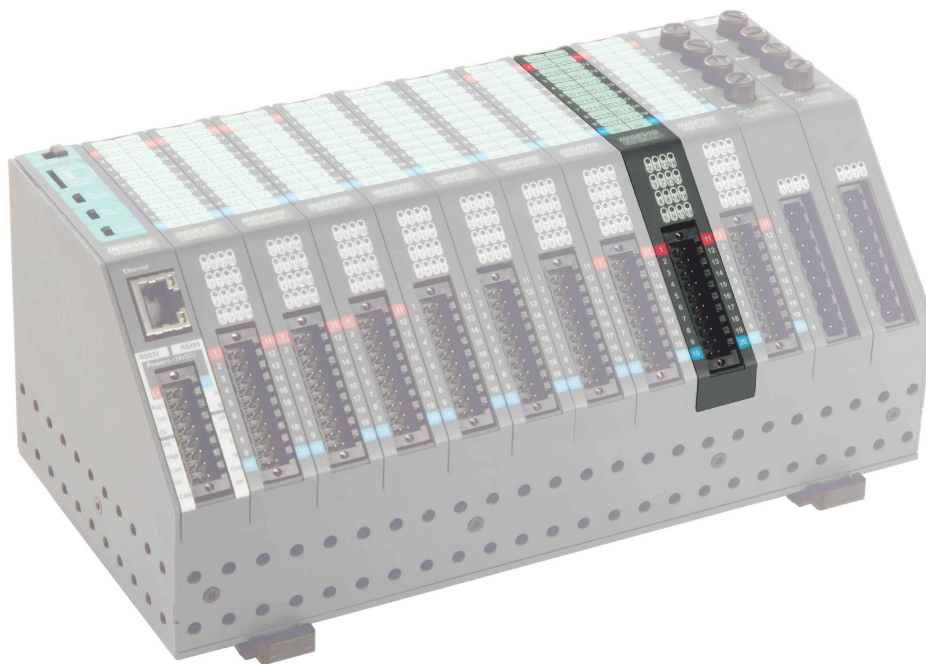

(valid from 06/2012)

Changes to older versions of this document

Changed in Rev. 4: in-/ output delay times changed
Changed in Rev. 5: connectors, new design line

Description

compact periphery module for 16 digital inputs 24V

- green diagnostic LED for each input
- insertion stripe with description field for every signal
- cage-clamp connector with 2 lift arms or bolt flanges on side

Application with 2-wire switches

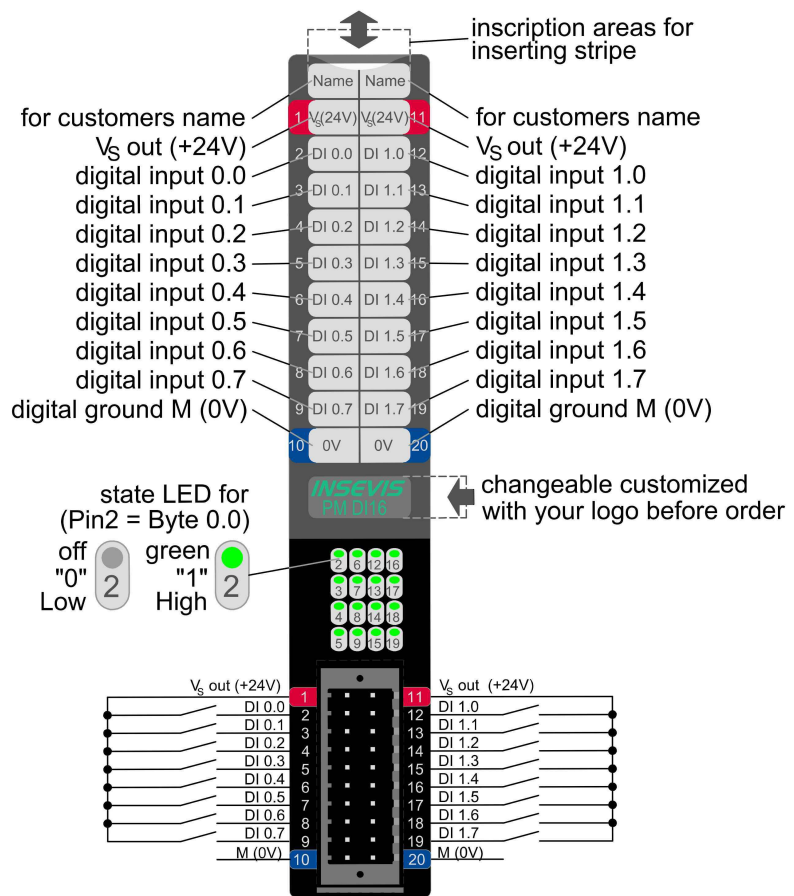


Figure above: Description and wiring of all connections of periphery module DI16

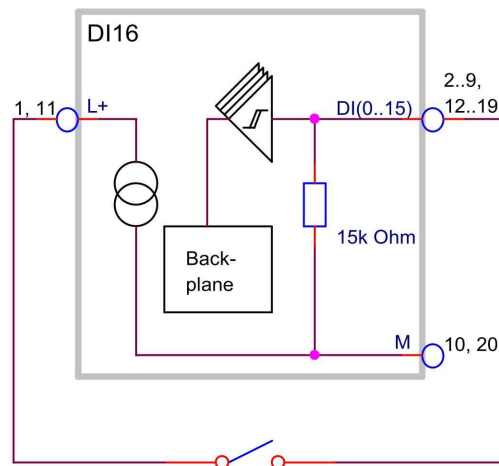


Figure above: Block diagram of DI16 for 2 wire switches

Input	
Start address:	<input type="text" value="0"/>
End address:	<input type="text" value="1"/>
Output	
Start address:	<input type="text" value="0"/>
End address:	<input type="text" value="0"/>

Figure above: Configuration block of start-/ end addresses of DI16-inputs (in byte) in the ConfigStage

Description

compact periphery module for 16 digital inputs 24V

- green diagnostic LED for each input
- insertion stripe with description field for every signal
- cage-clamp connector with 2 lift arms or bolt flanges on side

Application with 3- / 4-wire switches


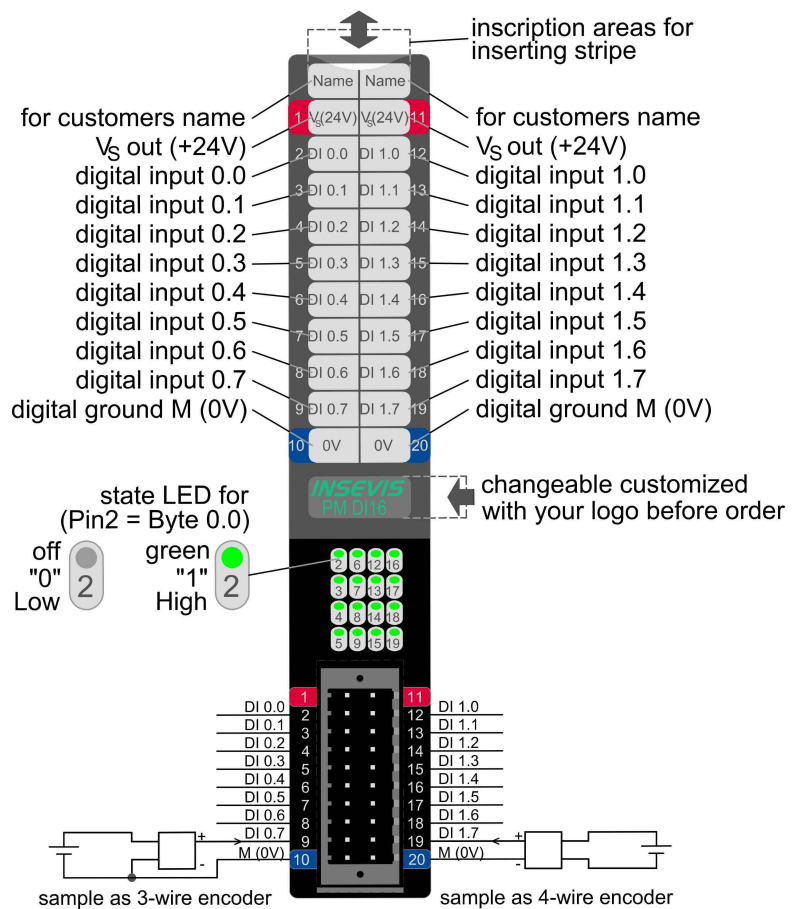


Figure above: Description and wiring of all connections of periphery module DI16

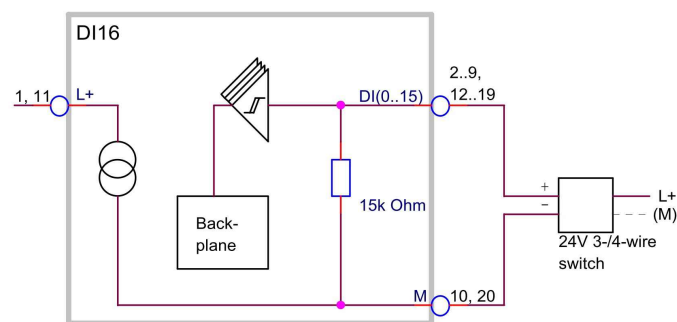

left: Block diagram of DI16 for 3- and 4-wire switches

Input	
Start address:	0
End address:	1
Output	
Start address:	0
End address:	0

left: Configuration block of start-/ end addresses of DI16-inputs (in byte) in the ConfigStage

Technical data	
Dimensions W x H x D (mm)	20 x 108 x 70 mm
Weight	ca. 150 g
Operating temperature range	-20°C ... +60°C (no condensation)
Storage temperature range	-30°C ... +80°C
Connection technology	connector with cage clamp technology for cross section up to max. 1,5mm ²
Sensor supply	short circuit proof output, current limited to 30 mA (typ.)
Load voltage L+	24V DC (11V ... 30V DC, is connected by device supply)
Wire length	
unshielded (max.)	30 m
shielded (max.)	100 m
Digital inputs	16
Diagnostic LEDs	16, green
Input voltage	
for signal 0	0V ... +5 V
for signal 1	+7,5V ... +30 V
Input current for signal 1	1 mA
Broken wire detection	no
Potential separation to PLC	no
Access of 2-wire-BERO	no
Input delay	90 µs (typ.)
Output delay	1,4 ms (typ.)
Sampling cycle time	as onboard module on the PLC = cycle synchronous

Ordering data module		
Identification	Order-no.	Packaging unit
Periphery module DI16	PM-DI16-02	PU: 1 piece

Ordering data accessoires		
Identification	Order-no.	Packaging unit
Connector 2x10pin with pin markings and lift arms on side	E-CON20D-00	PU: 1 piece
Connector 2x10pin with pin markings and bolt flanges on side	E-CONS20D-00	PU: 1 piece
Spare part: Inserting stripe for description fields, 2x11 fields *	E-LABES22-00	PU: 20 pieces
Inserting stripe V for logo and identification for rear side *	E-LABV-00	PU: 100 pieces

* (1x already part of first deliveries scope)

Qualified personnel

All devices described in this manual may only be used, built up and operated together with this documentation. Installation, initiation and operation of these devices might only be done by instructed personnel with certified skills, who can prove their ability to install and initiate electrical and mechanical devices, systems and current circuits in a generally accepted and admitted standard.

Manuals, sample programs

Additional documentation by manuals is available as well sample applications at the download area of www.insevis.com in English language for free download.

Copyright

This and all other documentation and software, supplied or hosted on INSEVIS web sites to download are copyrighted. Any duplicating of these data in any way without express approval by INSEVIS GmbH is not permitted. All property and copy rights of theses documentation and software and every copy of it are reserved to INSEVIS GmbH.

Trade Marks

INSEVIS refers that all trade marks of particular companies used in own documentation are reserved trade marks are property of the particular owners and are subjected to common protection of trade marks.

Disclaimer

All technical details in this documentation were created by INSEVIS with highest diligence. Anyhow mistakes could not be excluded, so no responsibility is taken by INSEVIS for the complete correctness of this information. This documentation will reviewed regularly and necessary corrections will be done in next version. With publication of this data all other versions are no longer valid.

With publication of this information all other versions are no longer valid.