


Product information

# Touchpanel

## HMI570V

## HMI570P

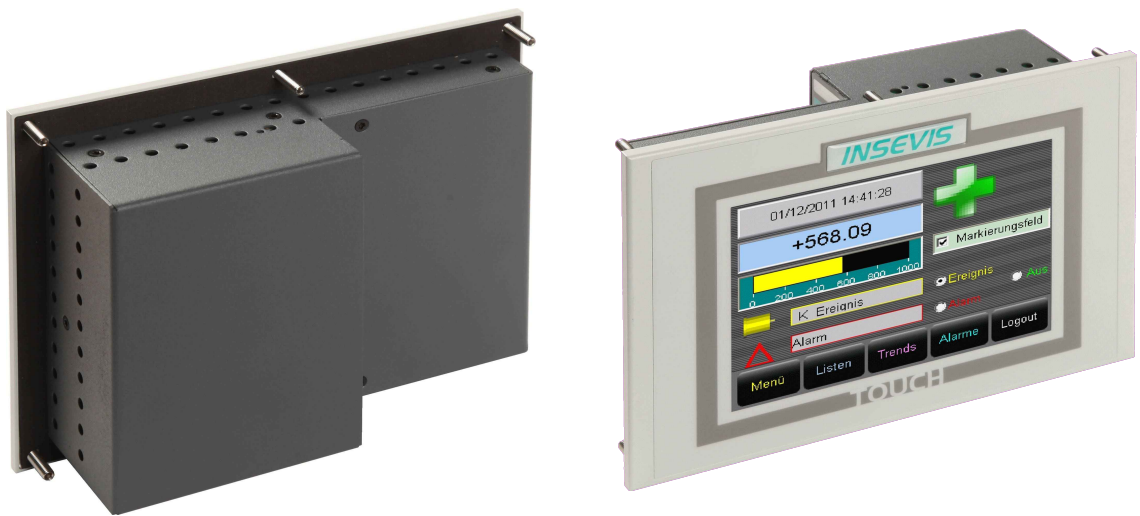

(valid from HMI-version HMI5x0x-03)

### Changes to older versions of this document

In Rev. 3 changed:: removed HMI580P

## Description

Panel with TFT-colour touch panel

- HMI570V/P  
5,7" TFT (320x240 pixel)

### Standard configuration:

- Ethernet with  
- RFC1006,
- Micro-SD-slot  
- for SD-cards up to 8 GByte
- Status LEDs for  
Power, Battery, Error, Run
- Inserting stripes for Logo and identification  
(thereby customized adaption possible easy)

### Scope of delivery:

- mounting set
- technical information
- brief instruction

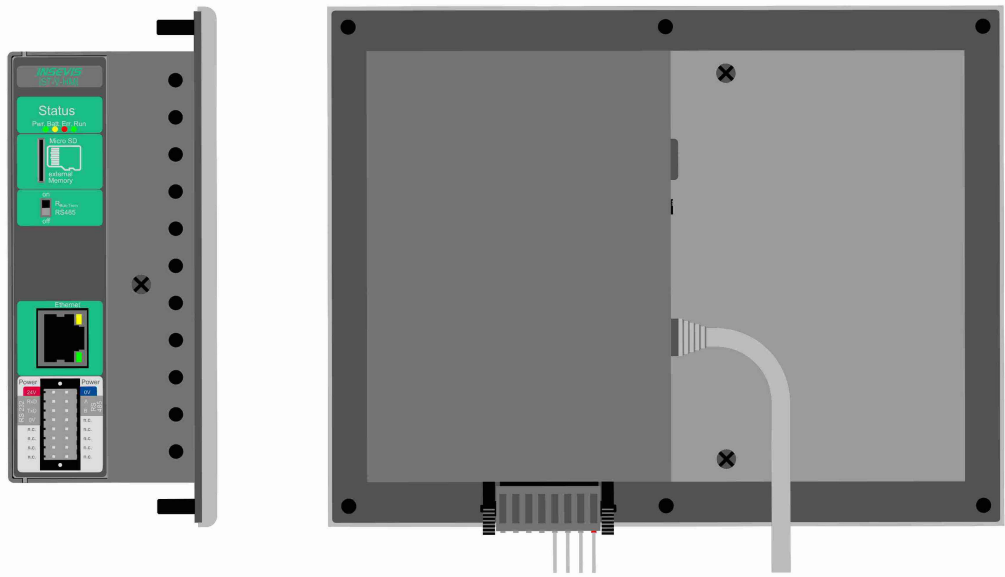


Figure above: Panel HMI570V device rear view and view from the side

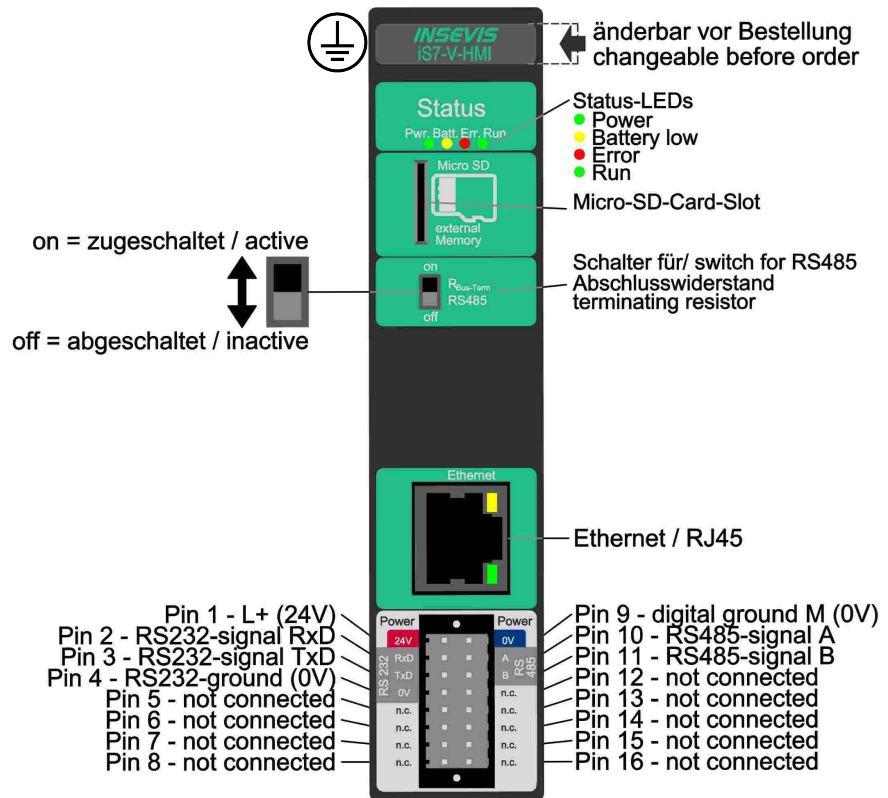


Figure above: Description of connections of all Panels with CPU-types V and P

Technical data	
Dimensions W x H x D (mm)	182 x 140 x 49
Cut out W x H (mm)	163 x 118
Weight	ca. 600 g
Operating temperature range	-20°C ... +60°C (without condensation)
Storage temperature range	-30°C ... +80°C
IP-protection class front panel rear side	IP65 IP41
Connection technology	unlockable connector with self-lock and 2 lift-arms (cage clamp technology) for cross section up to max. 1,5mm <sup>2</sup>
Load voltage L+	24V DC (11 V ... 30V DC)
Current consumption	50 mA ... 650 mA
Power dissipation	2 W (typ.), 10 W (max.)
Start-up current	< 3A
Diagonal of display (inch)	5,7" (145mm)
Display resolution (pixel)	HMI570V/P: 320x240 Pixel (QVGA)
Display unit	TFT display with 16Bit colours
Operating unit	analog resistive touch screen
Visualization software	VisuStage
Reference unit	HMI570V/P

Technical data	CPUs	
CPU-type	Type V (HMI570V)	Type P (HMI570P)
Flash internal - for visualization external memory	4 MByte Micro SD, up to max. 8 GByte	24 MByte Micro SD, up to max. 8 GByte
Real-time clock	yes (accumulator-backed hardware clock)	
Seriell interfaces (protocols)	COM2: RS 485 (only physical - protocols on demand)	
Ethernet (protocols)	ETHERNET: 10/100 Mbit (RFC1006)	

### Control panel cut out

**Dimensions**

Cut out  
W x H (mm) 163 x 118  
6 holes with D 4,5mm

Mounting depth  
ca. 49mm max.

Wiring outlet

- RJ45: in the center to the right
- connector 2x16 to the bottom (rear view and horizontal mounting)
- RJ45: in the center down
- connector 2x16 to the left (rear view and vertical mounting)

The drawing shows a rectangular cut out with a width of 163 mm and a height of 118 mm. There are six circular holes, each with a diameter of 4.5 mm, arranged in two rows of three. The top row of holes is 5.5 mm from the top edge. The bottom row of holes is 4 mm from the bottom edge. The distance between the center of the left and right holes in each row is 85.5 mm. The distance between the center of the top and bottom holes in each column is 129 mm. A dashed vertical line indicates the center of the panel.

## Documentation and samples



Internet: [www.insevis.de](http://www.insevis.de)  
 Box: Products / Panel-HMI  
 Download: TI-HMI xxxx.pdf  
 Box: Documentation  
 Download: Manual Panel-HMI.pdf



Internet: [www.insevis.de](http://www.insevis.de)  
 Box: Service  
 Panel-HMI  
 INSEVIS provides sample programs for each function, well documented for free download

## Ordering data devices

Identification	Order-no.	Packaging unit
Touchpanel <b>HMI570V</b>	HMI570V-02	PU: 1 piece
Touchpanel <b>HMI570P</b>	HMI570P-02	PU: 1 piece

## Ordering data accessoires

Identification / Order-No.	Identification / Order-No.
Connector 2x8pin (for PLC) / E-CON16-00	VA- Drill jig for 5,7"-devices, stainless steel / E-DRL57-00
Mounting set for 5,7"-devices * / E-MNT57-00 (PU10 pcs.)	
Micro SD-card 1GB (external memory) / E-MSD1-00	Micro SD-card 4GB (external memory) / E-MSD4-00
Micro SD-card 2GB (external memory) / E-MSD2-00	Micro SD-card 8GB (external memory) / E-MSD8-00
3D-doming label with custom logo for front side (PU100 pcs.)	Inserting stripe H for logo + identification for rear side (PU100 pcs.)
OEM-Firmware with customized logo included / SW-BS-OEM	

\* (1x already part of first deliveries scope)

### Copyright

This and all other documentation and software, supplied or hosted on INSEVIS web sites to download are copyrighted. Any duplicating of these data in any way without express approval by INSEVIS GmbH is not permitted. All property and copy rights of these documentation and software and every copy of it are reserved to INSEVIS GmbH.

### Trade Marks

INSEVIS refers that all trade marks of particular companies used in own documentation are reserved trade marks are property of the particular owners and are subjected to common protection of trade marks.

### Disclaimer

All technical details in this documentation were created by INSEVIS with highest diligence. Anyhow mistakes could not be excluded, so no responsibility is taken by INSEVIS for the complete correctness of this information. This documentation will reviewed regularly and necessary corrections will be done in next version. With publication of this catalog all other versions are no longer valid.